


AJAX

FIREPROTECT



Wireless fire detector with temperature sensor that monitors security in the room twenty four hours a day and immediately notifies of smoke and sharp jumps in temperature.

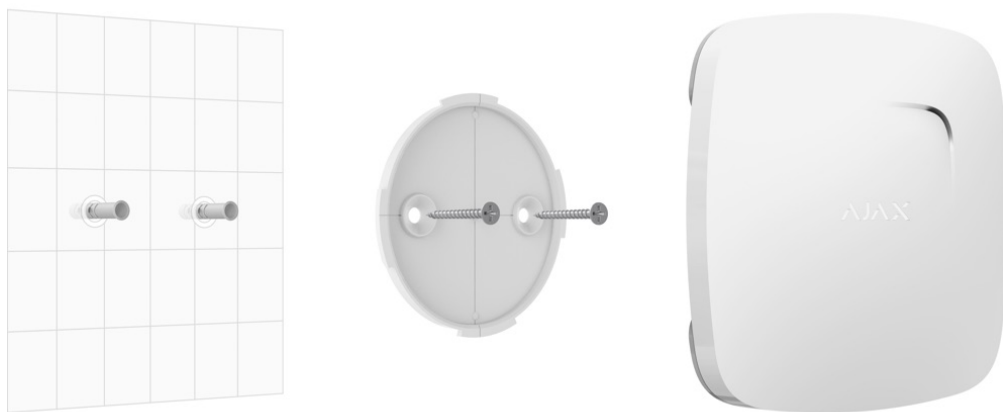

Ready to operate straight out the box: the battery is already installed, therefore there is no need to disassemble the detector. With one click, it can be connected to the hub in the mobile application. It can be mounted on the SmartBracket in just a few minutes.

Specification

Classification	Radio channel smoke detector with temperature sensor and built-in siren
Type of detector	Wireless
Installation method	Indoors
Compatibility	Operates with Hub, Hub Plus, ReX, ocBridge Plus, uartBridge
Sensing element	Photoelectric and temperature sensors
Activation threshold	+54°C to +65°C
Type of notification	Sound/light
Volume of built-in siren	85 dB
Alarm signal delivery time	0.15 s
False alarm filter	+
Interconnected alarms	+
Power supply	Battery: Two CR2 batteries Power supply voltage: 3 V Battery life — up to 4 years
Additional temp sensor	Available
Permissible humidity	Up to 80%
Anti-sabotage	Protection against fraud Jamming detection Tamper-resistant
Remote setting and testing	+
Dimensions	132x132x31 mm
Weight	220 g
Certification	CE 1922
Complete set	FireProtect detector SmartBracket mounting panel 2 x CR2 batteries (pre-installed) 1 x CR2032 backup battery (pre-installed) Installation set User's guide