




Narrow beam indoor motion detector. Protects windows, doors, and valuables

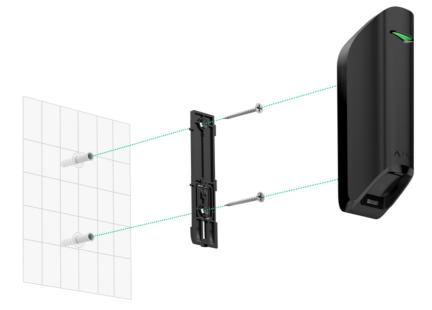

MotionProtect Curtain connects to the security system via Ajax app: scan the QR code, add the detector to the room, and proceed to installation.

Specification

Classification	Radio-interlinked photoelectric security detector
Type of detector	Wireless
Motion detection distance	From 6 to 15 meters (depending on the device settings)
Installation method	Indoors only
Compatibility	Operates only with Hub, Hub Plus, Hub 2 and ReX
Sensing element	Two PIR sensors
Alarm signal delivery time	0.15 seconds
Detection angles	Horizontally - 6°
	Vertically - 90°
Sensitivity	Adjustable, 3 levels
Recommend installation	
height	2.4 meters
Power supply	Battery: CR123A
	Power supply voltage: 3 V
	Battery life: up to 3 years
Jeweller radio tech	Communication range with detectors - up to 1,700m in an open space
	Two-way communication between devices
	Operating frequencies - 868.0-868.6MHz
	Self-adjusting RF output power - up to 20 mW
	Block encryption based on AES algorithm
	Detector polling period - 12-300s
	Frequency hopping
Temperature sensor	Available
Operating temp range	From -10°C to +40°C
Operating humidity	Up to 95%
Anti-sabotage	Fraud protection
	Jamming notification
	Tamper-resistant
Remote configuration	
and testing	+
Protection class	IP54
Dimensions	134 x 44 x 34mm
Weight	118g
Complete set	MotionProtect Curtain motion detector
	SmartBracket mounting panel
	CR123A batteries (pre-installed)
	Bracket
	Installation kit
	Users guide