




STREETSIREN DOUBLE DECK



Security service providers can print their logo and contact information on the front panel of an outdoor siren. Located at the building, it will serve as an additional marketing channel that reaches new customers: neighbors and visitors.

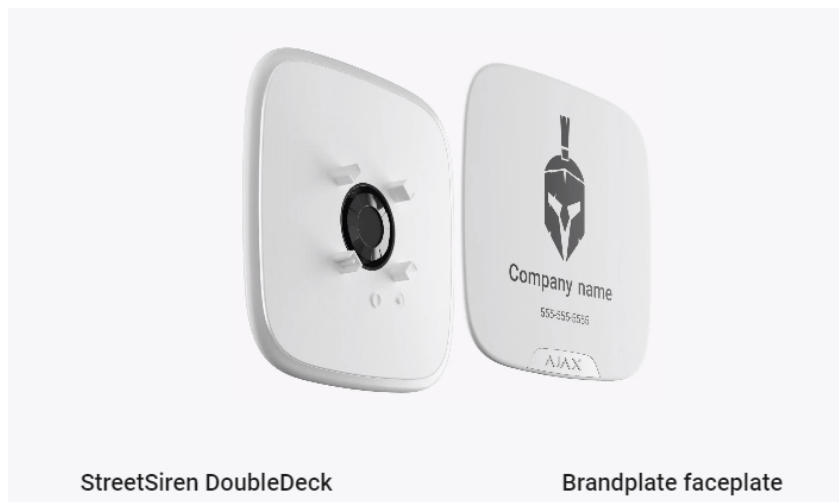

StreetSiren DoubleDeck

Brandplate faceplate

StreetSiren DoubleDeck is flexible when it comes to settings which makes it as relevant in a quiet gated community as in a loud industrial area. The buzzer can be set to generate sound from 85 to 113 dB for an adjustable period: 3 to 180 seconds. Or it can be completely silent when the device is set to respond to alarm triggerings only with LED indication. The Ajax app allows engineers to choose detectors that activate the siren. It helps to prevent awkward situations when neighbors are notified every time that a washing machine leaks.

Specification

Classification	Warning device with LED indicators (outdoor siren)
Type of siren	Wireless
Installation method	Outdoors/Indoors
Compatibility	Operates only with Hub, Hub Plus, Hub 2 and ReX
Type of notification	Sound/light
Sound volume level	Adjustable, 85-113dB at a distance of 1m
Alarm duration	Adjustable, 3-180s
Indication of armed / disarmed status	Available
Power Supply	Battery: Four CR123A batteries, 3V Mains supply: DC 12 V \pm 20%
Battery life	Up to 5 years
Jeweller radio tech	Communication range with central unit - up to 1500m in an open space Two-way communication between devices Operating frequencies - 868.0-868.6MHz Self-adjusting RF output power - up to 25 mW Block encryption based on AES algorithm Detector polling period - 12-300s
Temperature sensor	Available
Operating temp range	From -25°C to +60°C
Permissible humidity	Up to 95%
Ingress protection rating	Ip54
Anti-sabotage	Forgery prevention Jamming detection Tamper-resistant
Remote config and testing	Available
Dimensions	200 x 200 x 51mm
Weight	528g
Complete set	StreetSiren DoubleDeck SmartBracket mounting panel Installation set Users guide