

The DM-1500 is designed for both voice and speech applications.

---




Article number:DM-1500

---

### Specifications

Controls	Talk switch: Short-off type, slide on/off switch
Frequency response	70 Hz - 15 kHz
Connection	3-pin XLR jack
Rated impedance	600 Ω
Controls	Talk switch: Short-off type, slide on/off switch
Frequency response	70 Hz - 15 kHz
Microphone type	Dynamic microphone
Directivity	Cardioid
Microphone sensitivity	-56 dB (1 kHz 0 dB = 1 V/Pa)
Rated impedance	600 Ω
Finish	Zinc, die-cast, paint, metallic gold,

Appearance

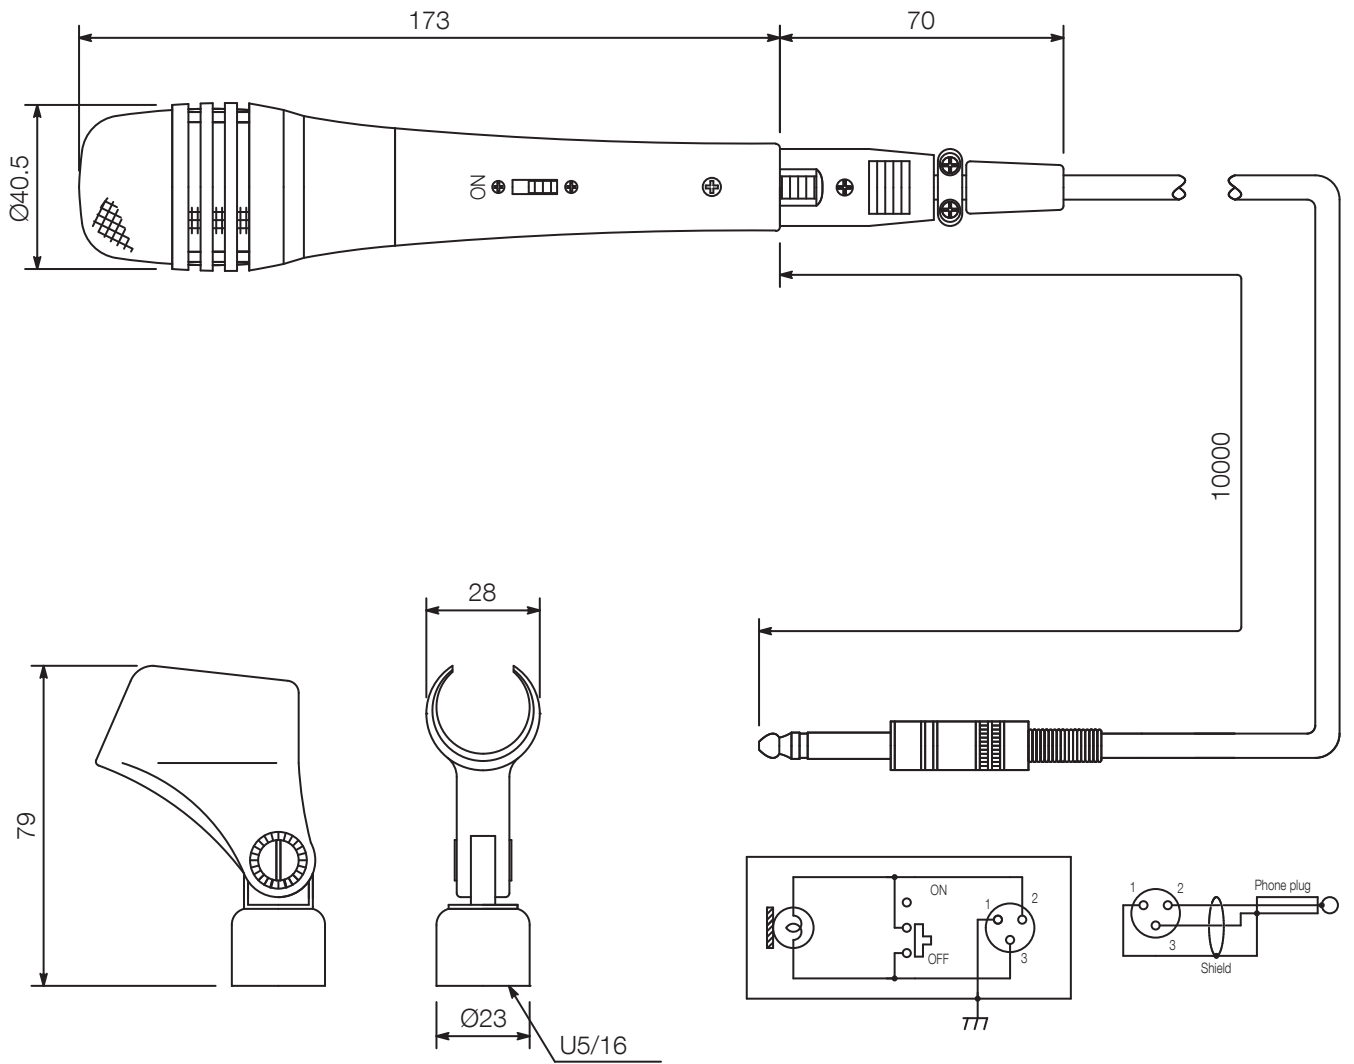

Circuit Diagram

UNIT:mm SCALE:1/2