

# BS-678BSB

WALL MOUNT SPEAKER

The BS-678BSB is a voice alarm certificated wall speaker. With a high quality sound cone speaker the BS-678BSB is suitable for announcement and music. Either concealed in-wall or open wiring can be used for installation.

The speaker's structure permits direct wall-mounting with screws, which prevents the speaker from falling even if an outward force is applied to it.

The input impedance can be easily changed by changing the tap position of the transformer.



Article number:BS-678BSB  
Alternative products: BS-678BSW


## Specifications

Sensitivity (1#W, 1#m)	94 dB 500 Hz - 5 kHz, pink noise
Frequency response	150 Hz - 18 kHz
Max. SPL (1 m)	98 dB 100 Hz - 10 kHz, pink noise
Directivity Angle catalogue output	500 Hz: 360°/330° 1 kHz: 135°/160° 2 kHz: 130°/135° 4 kHz: 70°/70°
Rated input (high impedance)	6 W (100 V), 3 W (70 V)
Tappings	100 V line: 1.7 kΩ (6 W) / 3.3 kΩ (3 W) / 6.7 kΩ (1.5 W) / 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W) / 3.3 kΩ (1.5 W) / 6.7 kΩ (0.8 W) / 13 kΩ (0.4 W)
Speaker component	15 cm cone type
Finish	HIPS resin, black (RAL 9011 or equivalent),
Operating temperature	-10 °C to +50 °C ( 14 °F to 122 °F)

# BS-678BSB

WALL MOUNT SPEAKER

Appearance

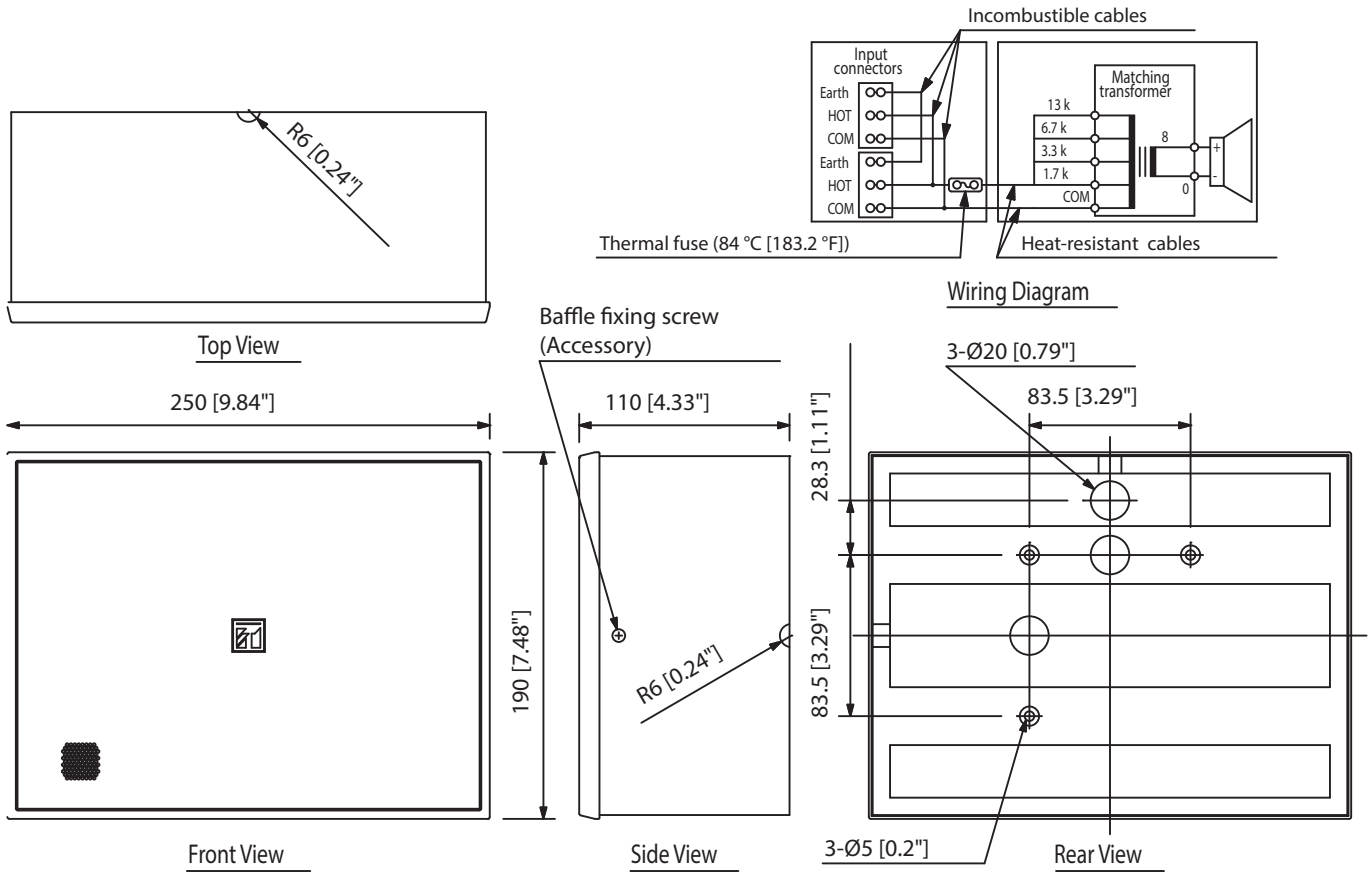

UNIT:mm

SCALE:1/4