


# F-1000WTWP EB-Q

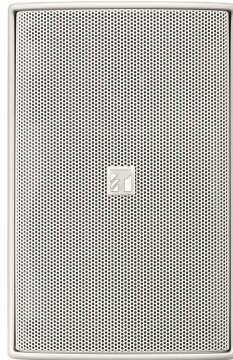

Article number: F-1000WTWP EB-Q  
 Alternative products: F-1000WTWP EB-Q,  
 F-1000BTWP EB-Q, F-2000WTWP EB-Q,  
 F-1300BTWP EB-Q, F-1300WTWP,  
 F-1300WTWP EB-Q

## Specifications

Sensitivity (1#V, 1#m)	87 dB at installation in 1/2 free sound field
Frequency response	85 Hz - 20 kHz (-10 dB)
Crossover frequency	5000 Hz
Rated input (high impedance)	15 W
Tappings	100 V : 670 Ω (15 W) / 1 kΩ (10 W) / 2 kΩ (5 W) / 3.3 kΩ (3 W) / 10kΩ (1 W) 70 V : 330 Ω (15 W) / 670 Ω (7.5 W) / 2 kΩ (2.5 W) / 3.3 kΩ (1.5 W) / 10kΩ (0.5 W)
Speaker component	Woofer: 10 cm cone-type Tweeter: balanced dome-type
Finish	HIPS resin, Steel plate, off-white (RAL 9010 or equivalent),
Operating temperature	-10°C to + 50°C

# F-1000WTWP EB-Q

Appearance

