


F-2000WTWP EB-Q

SPEAKER

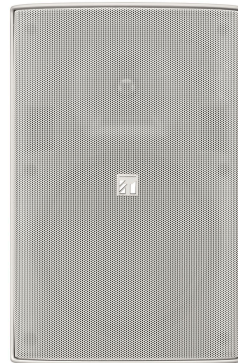

Article number:F-2000WTWP EB-Q
 Alternative products: F-2000BTWP EB-Q,
 F-2000WTWP EB-Q, F-1000BTWP EB-Q,
 F-1000WTWP EB-Q, F-1300BTWP EB-Q,
 F-1300WTWP, F-1300WTWP EB-Q

Specifications

Sensitivity (1#V, 1#n)	92 dB at installation in 1/2 free sound field 93 dB at installation in 1/2 free sound field with horn adapter
Frequency response	65 Hz - 20 kHz (-10 dB)
Crossover frequency	2500 Hz
Rated input (high impedance)	60 W
Tappings	100 V : 170 Ω (60 W) / 330 Ω (30 W) / 670 Ω (15 W) / 3.3 kΩ (3 W) 70 V : 83 Ω (60 W) / 170 Ω (30 W) / 330 Ω (15 W) / 670 Ω (7.5 W) / 3.3 kΩ (1.5 W)
Rated impedance	8 Ω
Speaker component	Woofer: 20 cm cone-type Tweeter: 25 mm dome-type
Finish	HIPS resin, Steel plate, off-white (RAL 9010 or equivalent),
Operating temperature	-10°C to + 50°C

F-2000WTWP EB-Q

SPEAKER

Appearance

