




Article number:EV-20R W


## Specifications

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power consumption   | 10 W (rated output)                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Power source        | Supplied from an external 24 V DC/400 mA power supply or from an optional AD-246 AC Adapter                                                                                                                                                                                                                                                                                                                                                       |
| Wave format         | 44.1 kHz sampling frequency, 16-bit PCM, WAV file (monaural)                                                                                                                                                                                                                                                                                                                                                                                      |
| Control input       | Play 1 – 4, stop: No-voltage make contact input, pulse make length: 200 ms, open voltage: 30 V DC, short-circuit current: 10 mA, removable terminal block (22 pins)                                                                                                                                                                                                                                                                               |
| Control output      | Busy: Contact capacity: 30 V DC/0.5 A, removable terminal block (22 pins)                                                                                                                                                                                                                                                                                                                                                                         |
| Input / Output      | Input / Recording input: Mic: -60 dBV, 2.2 k $\Omega$ / Line: -20 dBV, 10 k $\Omega$ , (Mic/Line changeable), unbalanced, phone jackLine input: 0 dBV, 10 k $\Omega$ , unbalanced, removable terminal block (22 pins)<br>Line output: 0 dBV, 600 $\Omega$ , unbalanced, removable terminal block (22 pins) / Headphone output: 0 dBV, 100 $\Omega$ , unbalanced, phonejack / Speaker output: 3 W, 8 $\Omega$ , removable terminal block (22 pins) |
| Distortion (value)  | < 1 %                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Max. recording time | 6 Min.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Power source        | Supplied from an external 24 V DC/400 mA power supply or from an optional AD-246 AC Adapter                                                                                                                                                                                                                                                                                                                                                       |
| Control input       | Play 1 – 4, stop: No-voltage make contact input, pulse make length: 200 ms, open voltage: 30 V DC, short-circuit current: 10 mA, removable terminal block (22 pins)                                                                                                                                                                                                                                                                               |
| Power consumption   | 10 W (rated output)                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Control output      | Busy: Contact capacity: 30 V DC/0.5 A, removable terminal block (22 pins)                                                                                                                                                                                                                                                                                                                                                                         |
| Distortion          | < 1 %                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Finish              | ABS resin, black,                                                                                                                                                                                                                                                                                                                                                                                                                                 |


## Appearance

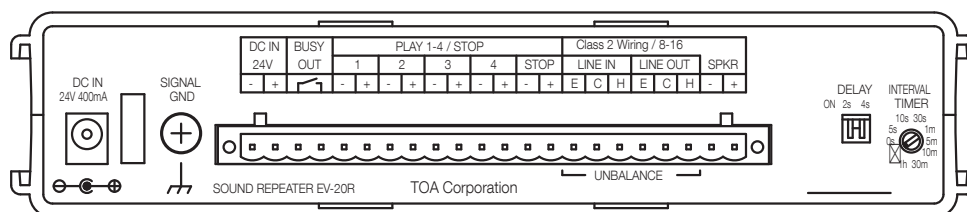

Rear View

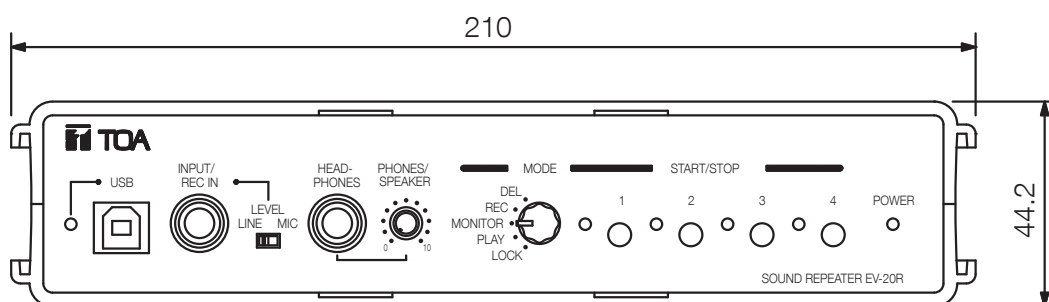

Front View

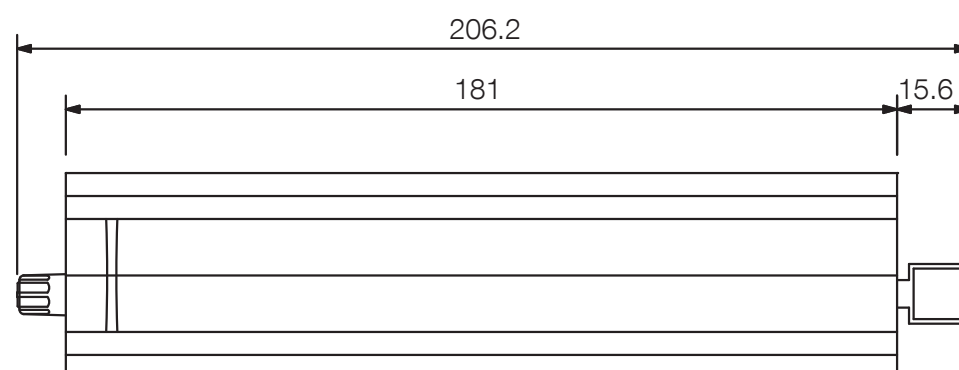

Side View

UNIT:mm

SCALE:1/2