

Datasheet

CDV-T5 - 2-Wire Touchscreen Video Door Station

Product Description

The CDV-T5 is the new addition to the 2EASY 2-wire range, featuring a fish-eye camera with 170° viewing angle and a built-in proximity and MIFARE® reader, allowing card access via the door station's internal lock output. All programming is done directly through the touchscreen - no software is required.

The door station has the facility for an external Wiegand output and can be operated via the [CDV-ACCS](#) Bus/Wiegand interface, allowing direct connection to an access control unit via the reader input port.

The door station is available in flush or surface mounting options and is compatible with all 2EASY 2-wire system [accessories](#).



Key Features

- Touchscreen video door station for apartment blocks
- 170° fish-eye camera
- Built-in proximity and MIFARE® reader
- Up to 32 users (monitors)
- Wiegand connection possible with [CDV-ACCS](#) interface
- Answer the door via the VDP Connect app (only with CDV-47DX monitor)

 Certification

 DEEE


RoHS Certification

 IP54

 -10°C to 50°C

Product Specifications


Material:	Stainless steel panel
Mounting:	Flush or surface
Technology:	2-wire, no polarity
User limit:	32 monitors
Card reader:	RFID, 125KHz, 13.56MHz
Camera:	2.7" fish-eye camera, 170° wide angle
Screen:	5" digital colour TFT, 800x480 pixels resolution
Unlocking time:	1 to 99s
Relays:	1
Cable type:	16AWG, Belden 8471 (recommended)

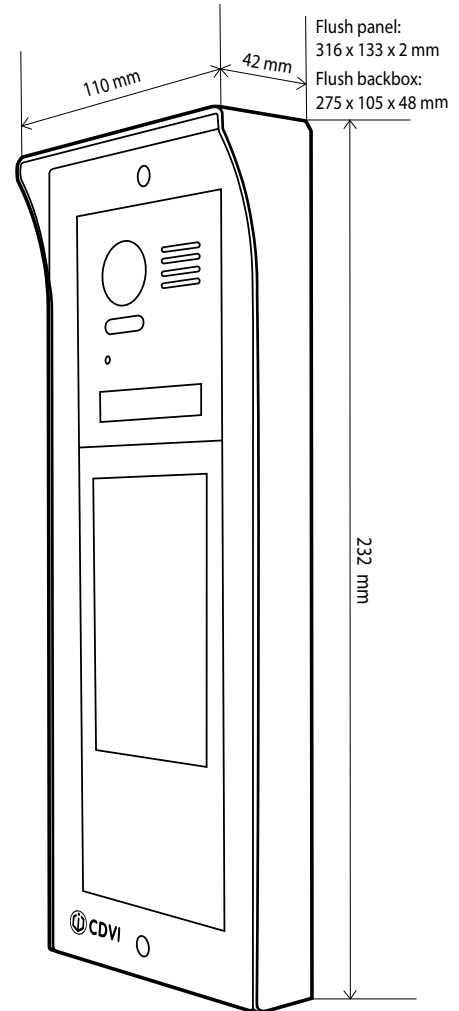

Electrical Specifications

Power input:	24Vdc (supplied by CDV-PC7)
Consumption:	Standby: 1W Working: 2W
Lock power supply:	250mA @ 12Vdc (Fail safe & fail secure)

Download the app today!



Search: VDP Connect



Range References

E0901D000534	CDV-T5S	2EASY 2-wire touchscreen video door station, surface mount
E0901D000535	CDV-T5F	2EASY 2-wire touchscreen video door station, flush mount