


AJAX

MOTIONPROTECTPLUS



Wireless motion detector with microwave sensor that notifies the owner of first signs of home or office intrusion. Designed for rooms with air conditioners, fireplaces and where there is a likelihood of light flickering, glare and reflections.

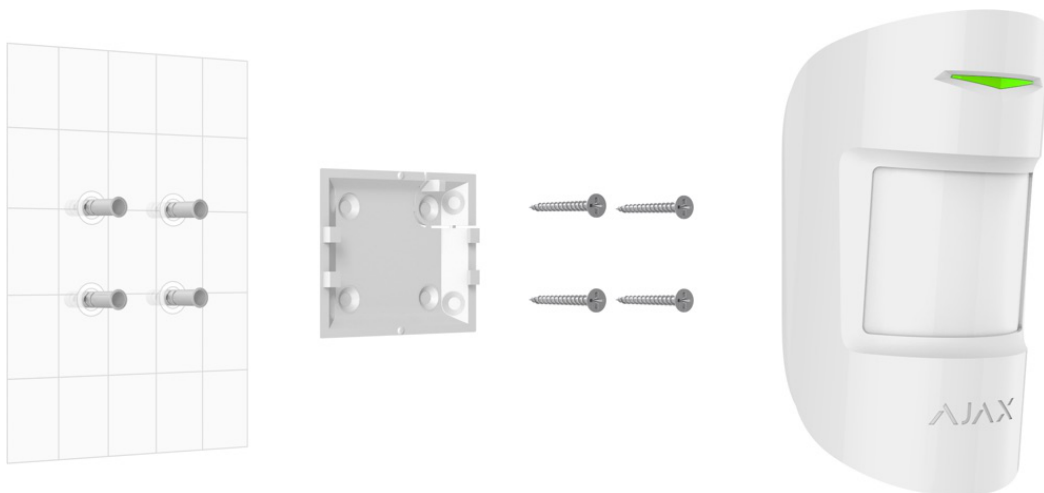

Ready to operate straight out the box. The battery is already installed inside, therefore there is no need to disassemble the detector. It can be mounted in just a few minutes using the SmartBracket mount.

Specification

Classification	Electro-optical combined radio channel security detector
Type of detector	Wireless
Installation method	Indoors
Compatibility	Operates with Hub, Hub Plus, ReX, ocBridge Plus, uartBridge
Sensing element	PIR sensor, microwave sensor (24 Ghz)
Alarm signal delivery time	0.15 s
Motion detection distance	Up to 12 m
Detection angles	Horizontal — 88.5°, Vertical — 80°
Sensitivity	Adjustable, 3 levels
Recommended installation height	2.4 m
Pet immunity	Weight — up to 20 kg, Height — up to 50 cm
Power supply	Battery: CR123A battery, Power supply voltage: 3 V Battery life — up to 5 years
Temperature sensor	Available
Operating temp range	From +5°C to +40°C
Permissible humidity	Up to 75%
Anti-sabotage	Protection against fraud Jamming detection Tamper-resistant
Remote setting and testing	+
Dimensions	110x65x50mm
Weight	96 g
Certification	Grade 2, CE
Complete set	MotionProtect Plus motion detector SmartBracket mounting panel CR123A battery (pre-installed) Installation set User's guide